

KEOPS V311R



3 x 16A/10kW max.


Housing: RITTAL - KS polyester

Upstream power supply: three-phase on contactor via terminal block

Downstream power distribution:

single phase: 3 x 16A sockets: 2P + E, 230V

The distribution box is available with 2P + E sockets complying with various standards: German, Swiss, British, Italian, Spanish, etc.

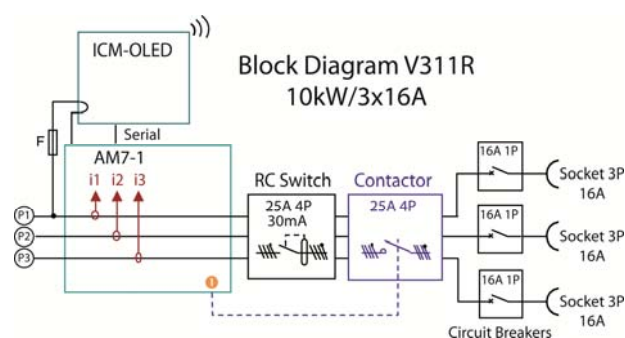

Technical Features

Protection devices:

- Residual current protection and main switch via residual current switch: 25A/30mA, 400V, 4P
- Protection of 3 single phase sockets by 3 x 16 A circuit breakers: 230 V, 1 P or 1 P + N, C/D curve

Contactor: 1 contactor 3 x 230 V/25 A, 3 P or 4 P *

Dimensions: (WxHxD) 250x350x150 (excluding handle)

Weight: 7.5 kg

Protection index: IP44 with protective glass option on ICM/OLED and circuit breakers (IP20 without protective glass)

Standards: complying with standards IEC/EN 60439-1, IEC 60364-1, IEC/EN 60950-1 and 89/336/EEC EMC.

* Depending on earth system and regulations in force in the country concerned